



# MELODY 2 LIFTING PLATFORM

## Melody 2 non-enclosed Lifting Platform

The Terry Melody 2 Lifting Platform offers an aesthetically pleasing solution to the problem of vertical wheelchair access outside domestic properties. This innovative lift, which is designed and manufactured in the UK, ensures that special emphasis has been placed on the needs of the lift user.

## Complies with BS6440 and Part M of the Building Regulations. It is CE certified to the Machinery Directive

- Emergency lowering facility
- Call and send buttons on landing
- Polycarbonate infill panels
- No enclosure required
- Integral ramp eliminates the requirement for a pit – minimises building work
- Lift carriage finished in attractive, durable stainless steel
- 1100 x 1400 Platform available as an option
- RAL colours available as an option
- Security options available e.g. Radio Enabler and Radio Isolate
- Alarm

## Standard Specification

**Application range:** People with impaired mobility and Wheelchair users. Internal & External Locations

**Maximum safe working load:** 440Kg

**Maximum travel:** 3000mm

**Rated speed:** 0.08 metres per second

**Power supply electrical requirements:**  
 220 / 240V~50 / 60 Hz-13A single phase (max).  
 Dedicated RCD protected supply


**Low voltage control system:** 12VDC

**Operating temperature range:** -10°C to +40°C

**Safety:** Full platform safe surface which stops the lift should it touch any obstacle in the down direction.  
 Fully interlocked upper and lower gates

**Drive:** Direct acting hydraulic

## Melody 2 Lift Dimensions (in mm)

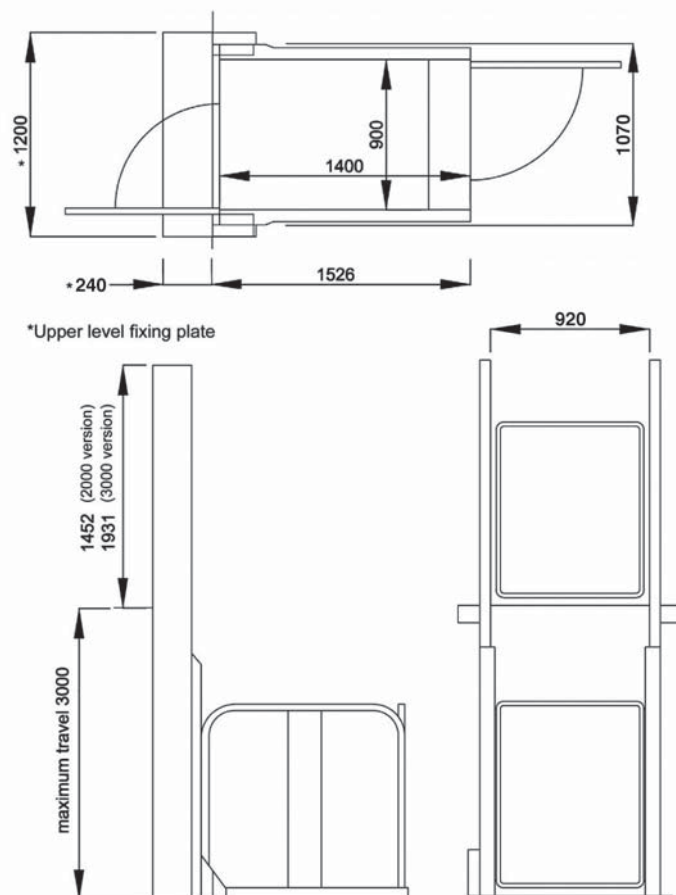

**Terry**   
 total mobility solutions

**Terry Group Ltd.**  
 Longridge Trading Estate,  
 Knutsford, Cheshire, WA16 8PR

Tel: 0845 365 5366  
 Fax: 0845 365 5367  
 email: [sales@terrylifts.co.uk](mailto:sales@terrylifts.co.uk)  
[www.terrylifts.co.uk](http://www.terrylifts.co.uk)

